



Flight Light Inc.  
 2708 47th Ave.  
 Sacramento, California, U.S.A.  
 95822-3806

PH (916) 394-2800    FX (916) 394-2809  
 TF (800) 806-3548    EM info@flightlight.com

## L-864 LED Flashing Red Obstruction Beacon

### Compliance and Applications

FAA Type: L-864 Flashing Red  
 Obstruction Beacon

ICAO Type: Medium Intensity  
 Obstacle Light

ETL Certified to:  
 FAA Advisory Circular AC  
 150/5345-43E


Compliant to:  
 ICAO Annex 14, MIL-C-7989,  
 DGAC of Mexico, CAR 621.19

### Why Our Beacon is Better

The Flight Light L-864LED obstruction beacon provides an excellent LED based solution to the FAA L-864 style of flashing red beacons. The L-864LED is available in 120 and 240 VAC or 48 VDC configuration. Applications include arctic environments when ordered with optional arctic kit (AK).

### Features

- Lasts up to 20 times longer than incandescent lighted L-864.
- 95% less power consumption than an equivalent incandescent unit.
- 70 Watts total power consumption.
- 18 lbs. total weight.
- Available as flashing or steady burn (flasher not included).
- Creates no EMI/RFI.
- Resistant to shock and vibration.
- Direct replacement, mounts to existing bolt pattern of equivalent incandescent lighted L-864.
- 5 year warranty.

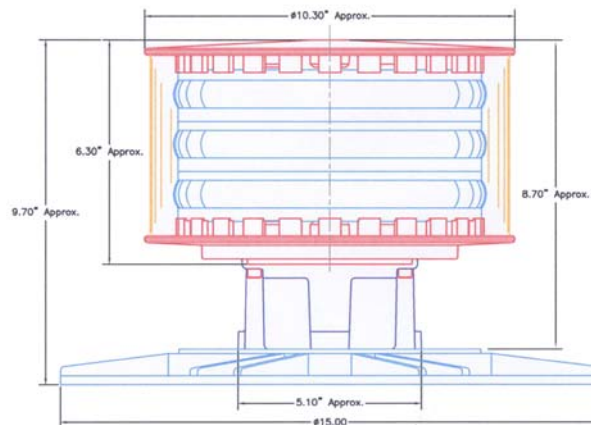

*L-864LED Beacon Light*

### Ordering Code

Item	Part Number	Description
1	74-L864LED-120	Complete Assy., 120 VAC
2	74-L864LED-240	Complete Assy., 240 VAC
4	74-L864LED-48D*	Complete Assy., 48 V dc
5	74-L864LED-AK	Incorporated Arctic Kit
6	74-L864LED-SA	Surge Arrester

\* Not ETL certified.

**Visit our web site: [www.flightlight.com](http://www.flightlight.com)**